




Tubular Heaters

Flanged


Special Features

SF-13B: Moisture tight/Explosion resistant terminal enclosure.

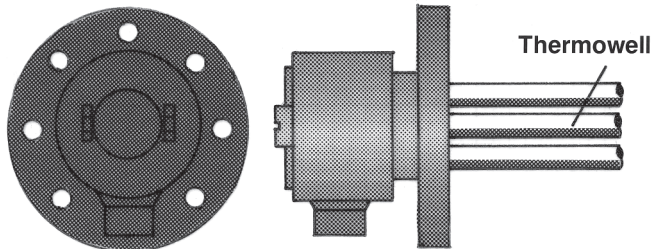

Available on:
3", 5", 6", 8" flanged. Enclosure sizes vary with element sizes.

XS-55: Thermostat control. Integral bulb and capillary control with thermowell. Two temperature ranges available. Specify XS-55 (0°–100°F) or XS-55 (60°–250°F).

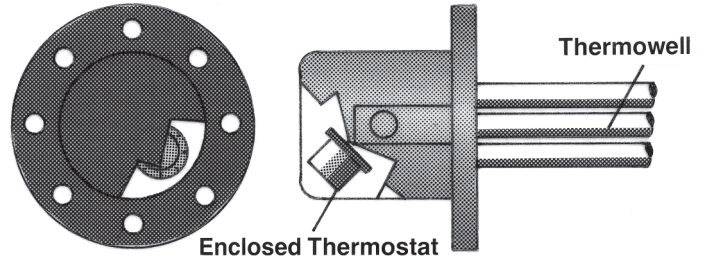

Available on:
3", 5", 6", 8" flanged. Enclosure sizes vary with element size.

How To Order

Specify: catalog number, wattage, voltage, and special features, if any. Other sizes are available. Consult factory.

Example: BS3-18.06-J/1000W120V

▼ IN STOCK ITEMS ▼

Drum Heaters


Direct Immersion



Features

- Designed for direct immersion thru 2" bung opening in 55 gallon drums.
- Incoloy sheath for long life in most materials.
- 60-250°F integral thermostat.
- Manual reset thermostat protects against overheating.
- Adjustable mounting bracket.
- Low watt density (1000w - 120v - 8w watts per square inch)
- High watt density (4000w - 240v - 32 watts per square inch) for heating water and water based solutions.

Cat. No.	Watts	Volts
DT-1-1-2	1000w	120v
DT-1-2-2	4000w	240v

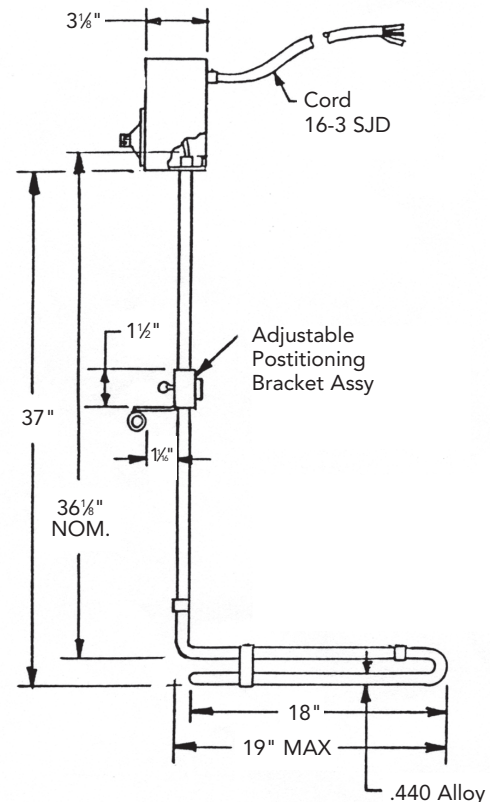

TUBULAR