




Dual SSR DIN Rail Mount to 40 Amps AC @ 40°C Ambient



FEATURES:

- Two independent DIN mountable SSRs in 1.80 inch width
- Standard relays approved to the following: UL and CE
- 250 Faston terminals for quick connection

| PART NO. | INPUT RANGE | LOAD CURRENT (Amps AC) | LINE RANGE (VAC) | TRANSIENT OVER VOLTAGE | APPLICATION NOTES |
|------------|-------------|------------------------|------------------|------------------------|---|
| HBC-D25HDA | 4-15 VDC | .15 - 30 | 48-530 VAC | 1200 V _{pk} | • Load current 20 Amps maximum per pole |
| HBC-D40HDA | | .15 - 40 | | | |
| HBC-D25HEA | 15-32 VDC | .15 - 30 | | | |
| HBC-D40HEA | | .15 - 40 | | | |

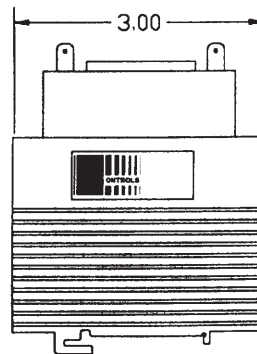

NOTES:

- 1) Heat sink black anodized aluminum
- 2) All dimensions in inches
- 3) Consult HBCcontrols for application information